



# ZGS38 Combine Chain

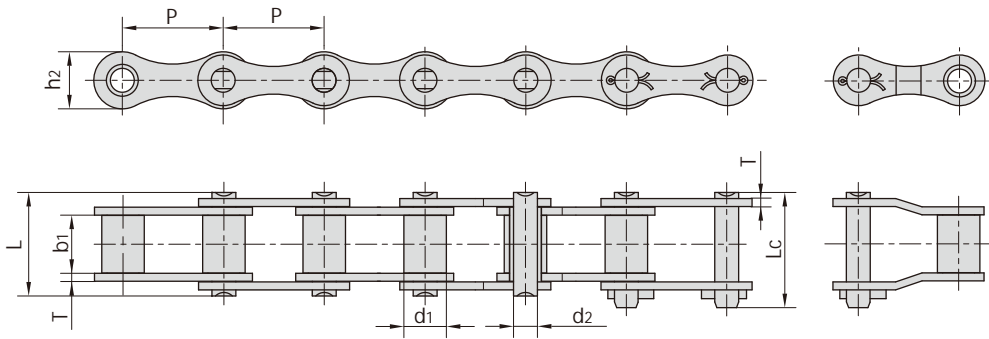

| Chain No. | Pitch | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |        | Inner plate depth  | Plate thickness | Tensile strength | Average tensile strength | Weight per meter |
|-----------|-------|--------------------|----------------------------|--------------------|------------|--------|--------------------|-----------------|------------------|--------------------------|------------------|
|           | P     | d <sub>i</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | Lc max | h <sub>2</sub> max | T max           | Q min            | Q <sub>0</sub>           | q                |
|           | mm    | mm                 | mm                         | mm                 | mm         | mm     | mm                 | mm              | kN/lbf           | kN                       | kg/m             |
| ZGS38     | 38.0  | 16.00              | 22.0                       | 9.00               | 39.0       | 43.0   | 21.5               | 3.0             | 45.0/10116       | 54.0                     | 2.00             |
| ZGS38H    | 38.0  | 16.00              | 22.0                       | 9.00               | 43.2       | 46.5   | 21.5               | 4.0             | 45.0/10116       | 54.0                     | 2.43             |
| ZGS38S    | 38.0  | 15.88              | 22.0                       | 7.92               | 36.7       | 41.0   | 21.3               | 2.5             | 40.0/8992        | 43.0                     | 1.89             |
| ZGS38SL   | 38.0  | 16.50              | 22.0                       | 7.92               | 36.7       | 41.0   | 21.3               | 2.5             | 40.0/8992        | 43.0                     | 1.92             |
| ZGS38SH   | 38.0  | 15.88              | 22.0                       | 7.92               | 39.5       | 43.0   | 21.3               | 3.2             | 45.0/10116       | 50.0                     | 2.15             |
| ZGS38SHL  | 38.0  | 16.50              | 22.0                       | 7.92               | 39.5       | 43.0   | 21.3               | 3.2             | 45.0/10116       | 50.0                     | 2.18             |

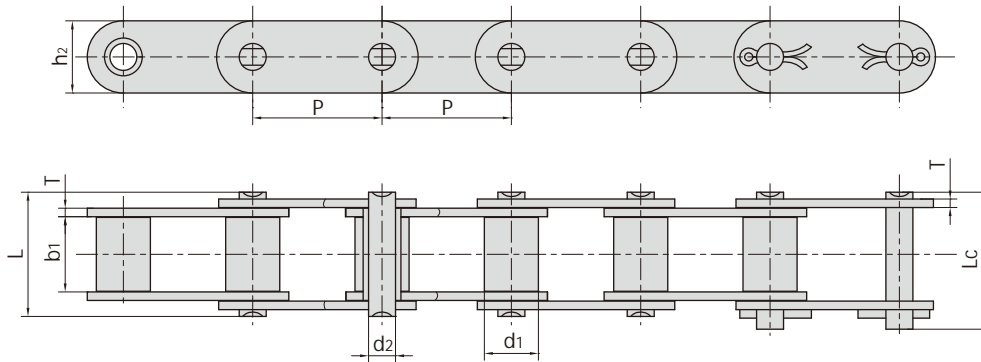

| Chain No. | Pitch | Roller diameter    | Width between inner plates | Pin diameter       | Pin length |        | Inner plate depth  | Plate thickness | Tensile strength | Average tensile strength | Weight per meter |
|-----------|-------|--------------------|----------------------------|--------------------|------------|--------|--------------------|-----------------|------------------|--------------------------|------------------|
|           | P     | d <sub>i</sub> max | b <sub>1</sub> min         | d <sub>2</sub> max | L max      | Lc max | h <sub>2</sub> max | T max           | Q min            | Q <sub>0</sub>           | q                |
|           | mm    | mm                 | mm                         | mm                 | mm         | mm     | mm                 | mm              | kN/lbf           | kN                       | kg/m             |
| CZGS38    | 38.0  | 15.88              | 22.0                       | 7.92               | 39.0       | 43.0   | 21.3               | 3.0             | 45.0/10116       | 54.0                     | 2.39             |
| CZGS38S   | 38.0  | 15.88              | 22.0                       | 7.92               | 36.7       | 41.0   | 21.3               | 2.5             | 40.0/8992        | 43.0                     | 2.13             |
| CZGS38SH  | 38.0  | 15.88              | 22.0                       | 7.92               | 39.5       | 43.0   | 21.3               | 3.2             | 45.0/10116       | 54.0                     | 2.42             |
| CZGS38SHL | 38.0  | 16.50              | 22.0                       | 7.92               | 39.5       | 43.0   | 21.3               | 3.2             | 45.0/10116       | 54.0                     | 2.45             |
| CZGS38HT  | 38.0  | 15.88              | 22.0                       | 7.92               | 40.5       | 44.0   | 21.3               | 3.5             | 50.0/11241       | 55.0                     | 2.63             |