


Connecting Pin for Fastening Leaf Chain and Endplates Pear Drop) as Inner or Outer Link



All pins are fitted with 2 cotters and - from BL 1234 and F 38 upwards - with 2 additional washers.

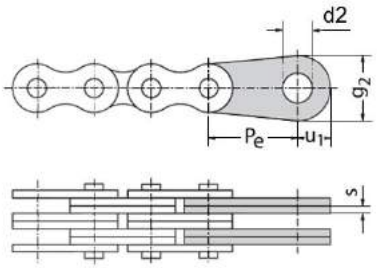


Type IEG

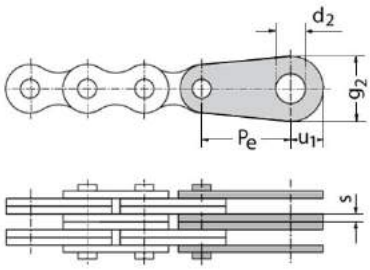


Type AEG


Ref.	ISO DIN	Pitch	Dimensions				Endplates (Pear Drop)					
		P	l	L	d	d2	Ref. IEG / AEG	Pe	d2A11	g2	s	u1
		mm	mm	mm	mm	mm		mm	mm	mm	mm	mm
F 12-22 CP	LL 0822		6,9	13,2			F 12-22					
F 12-44 CP	LL 0844	12,70	16,0	22,2	4,45	1,60	F 12-44	15	6	16,0	1,7	10,0
F 12-66 CP	LL 0866		23,0	29,2			F 12-66					
F 15-22 CP	LL 1022		7,0	13,5			F 15-22					
F 15-44 CP	LL 1044	15,875	15,0	21,1	5,08	1,60	F 15-44	20	8	18,0	1,5	11,0
F 15-66 CP	LL 1066		22,0	28,2			F 15-66					
F 15-88 CP	LL 1088		28,0	34,2			F 15-88					
F 19-22 CP	LL 1222		7,7	13,9			F 19-22					
F 19-44 CP	LL 1244		17,6	25,5	5,72	2,00	F 19-44	30	10	20,0	1,9	12,0
F 19-66 CP	LL 1266	19,05	24,7	32,7			F 19-66					
F 19-88 CP	LL 1288		32,2	40,2			F 19-88					
F 19-44V CP	LL 1244V		23,0	30,2	6,50	2,00	F 19-44V	25	10	19,8	2,35	11,2
F 19-66V CP	LL 1266V		33,0	40,3			F 19-66V					
F 25-22 CP	LL 1622		13,8	24,1			F 25-22					
F 25-44 CP	LL 1644	25,40	28,0	38,7	8,28	3,20	F 25-44	30	12	25,0	3,0	15,0
F 25-66 CP	LL 1666		41,0	51,7			F 25-66					
F 25-88 CP	LL 1688		54,0	64,7			F 25-88					
F 31-22 CP	LL 2022		15,3	26,1			F 31-22					
F 31-44 CP	LL 2044	31,75	33,0	43,7	10,19	3,20	F 31-44	50	18	40,0	3,5	25,0
F 31-66 CP	LL 2066		47,0	57,7			F 31-66					
F 31-88 CP	LL 2088		62,0	72,7			F 31-88					
F 38-22 CP	LL 2422		21,8	34,1			F 38-22					
F 38-44 CP	LL 2444	38,10	48,2	60,6	14,63	4,00	F 38-44	65	24	50,0	5,0	29,0
F 38-66 CP	LL 2466		69,2	81,6			F 38-66					
F 38-88 CP	LL 2488		90,2	102,3			F 38-88					
F 44-22 CP	LL 2822		29,7	42,1			F 44-22					
F 44-44 CP	LL 2844	44,45	55,0	67,5	15,90	4,00	F 44-44	80	28	60,0	6,0	32,0
F 44-66 CP	LL 2866		80,2	92,7			F 44-66					
F 44-88 CP	LL 2888		106,0	118,5			F 44-88					
F 50-22 CP	LL 3222		34,4	51,9			F 50-22					
F 50-44 CP	LL 3244	50,80	59,9	77,5	17,81	5,00	F 50-44	90	32	70,0	6,3	43,0
F 50-66 CP	LL 3266		86,4	104,0			F 50-66					
F 50-88 CP	LL 3288		113,9	131,5			F 50-88					
F 63-22 CP	LL 4022		39,9	60,8			F 63-22					
F 63-44 CP	LL 4044	63,50	73,3	94,3	22,89	6,30	F 63-44	100	38	80,0	8,0	46,5
F 63-66 CP	LL 4066		106,6	127,6			F 63-66					
F 63-88 CP	LL 4088		140,1	161,1			F 63-88					

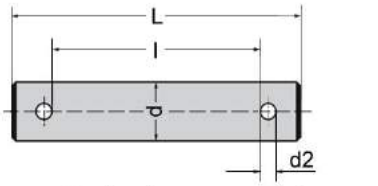

All pins are fitted with 2 cotters and - from BL 1234 and F 38 upwards - with 2 additional washers.

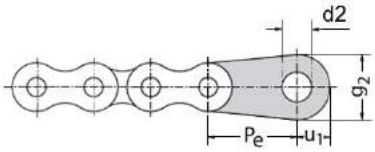

Type IEG

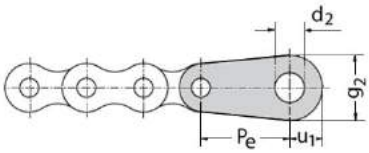

Type AEG

Ref.	Pitch	Dimensions				Endplates (Pear Drop)					
	P	l	L	d	d2	Ref. IEG / AEG	Pe	d2A11	g2	s	u1
	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm
BL 422 CP / AL 522 CP	12,70	10,8	17,0	5,08	1,6						
BL 423 CP		12,7	18,9								
BL 434 CP		17,0	23,2								
BL 444 CP / AL 544 CP		19,0	25,2								
BL 446 CP		23,0	29,2								
BL 466 CP / AL 566 CP		27,0	33,3								
BL 488 CP / AL 588 CP		35,5	41,8								
BL 522 CP	15,875	12,8	19,4	5,94	2,0	AL 622	25	10	19,8	2,4	11,2
BL 523 CP		15,0	21,6								
BL 534 CP		20,0	26,6								
BL 544 CP / AL 644 CP		22,5	29,1			AL 644					
BL 546 CP		27,0	33,7								
BL 566 CP / AL 666 CP		32,0	38,7			AL 666					
BL 588 CP / AL 688 CP		42,4	49,3			AL 688					
BL 623	19,05	20,0	30,7	7,92	3,2						
BL 634		27,0	37,7								
BL 644 / AL 844		30,0	40,7								
BL 646		37,0	47,7								
BL 666 / AL 866		43,0	53,7								
BL 688 / AL 888		56,5	67,2								
BL 822	25,40	21,7	32,4	9,53	3,2	AL 1022	40	14	30,0	4,0	18,0
BL 823		25,0	35,7								
BL 834		33,0	43,7								
BL 844 / AL 1044		37,0	47,7			AL 1044					
BL 846		46,0	56,7								
BL 866 / AL 1066		53,0	63,7			AL 1066					
BL 888 / AL 1088		69,5	80,3			AL 1088					
BL 1023	31,75	30,0	42,4	11,10	4,0						
BL 1034		39,2	51,6								
BL 1044 / AL 1244		44,2	56,6								
BL 1046		54,2	66,6								
BL 1066 / AL 1266		63,2	75,6								
BL 1088 / AL 1288		79,9	92,4								
BL 1223	38,10	34,5	46,9	12,70	4,0						
BL 1234		46,2	58,6								
BL 1244 / AL 1444		50,0	64,4								
BL 1246		63,5	76,0								
BL 1266 / AL 1466		75,3	87,8								
BL 1288 / AL 1488		98,6	111,1								
BL 1423	44,45	38,7	51,1	14,27	4,0						
BL 1434		52,2	64,6								
BL 1444		58,6	71,1								
BL 1446		71,7	84,2								
BL 1466		85,1	97,7								
BL 1623	50,80	43,1	60,6	17,46	5,0						
BL 1634		58,0	75,5								
BL 1644		65,7	82,9								
BL 1646		79,9	97,4								
BL 1666		94,6	112,2								
BL 1688		124,0	141,6								