


Chain with attachment for feeder house

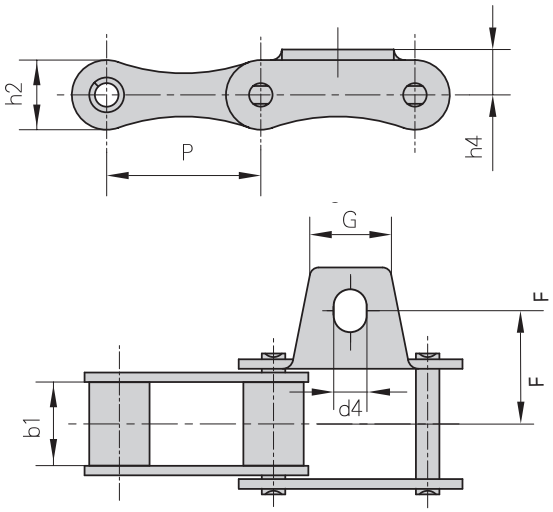


K1

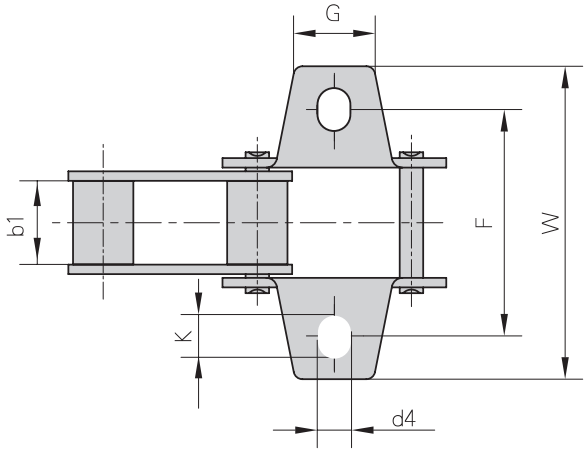

Chain ref.	Dimensions									
	P	b1	G	F	F1	W	h4	d4	K	h2
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
S32 A1/K1	29,21	15,88	15,0	42,9	21,4	61,0	8,6	5,3	6,9	13,2
S42 A1/K1	34,93	19,05	17,5	54,0	27,0	74,9	14,0	8,3	11,5	19,8
S45 A1/K1	41,40	22,23	22,0	54,0	27,0	75,0	11,4	8,5	11,7	17,3
S52 A1/K1	38,10	22,23	19,0	58,8	29,4	78,0	11,4	8,3	10,0	17,3
S55 A1/K1	41,40	22,23	22,0	54,0	27,0	75,0	11,4	8,5	11,7	17,3
S62 A1/K1	41,91	26,2	22,0	66,8	33,4	95,4	11,4	8,3	14,7	17,3
S77 A1/K1	58,34	22,23	25,0	76,2	38,1	102,0	20,8	8,3	11,5	26,2
S88 A1/K1	66,27	28,58	22,0	97,0	48,5	119,4	20,8	8,3	9,9	26,2

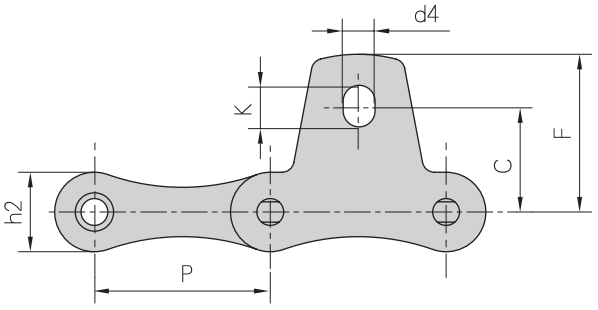


SK1




Chain ref.	Dimensions							
	P	b1	h2	T	C	F	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm
S32 SA1/SK1	29,21	15,88	13,2	1,8	17,3	26,2	5,3	6,9
S42 SA1/SK1	34,93	19,05	19,8	2,8	23,6	34,3	8,3	11,5
S45 SA1/SK1	41,40	22,23	17,3	2,8	19,8	30,2	8,3	11,5
S52 SA1/SK1	38,10	22,23	17,3	2,8	22,1	31,8	8,3	9,9
S55 SA1/SK1	41,40	22,23	17,3	2,8	19,8	30,2	8,3	11,5
S62 SA1/SK1	41,91	26,20	17,3	2,5	24,6	38,6	8,3	14,7
S77 SA1/SK1	58,34	22,23	26,2	4,0	36,3	50,0	8,3	11,5
S88 SA1/SK1	66,27	28,58	26,2	4,0	43,7	55,6	8,3	9,9


Chain with attachment for feeder house

A1

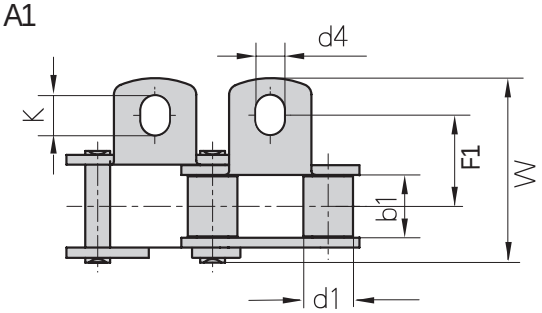

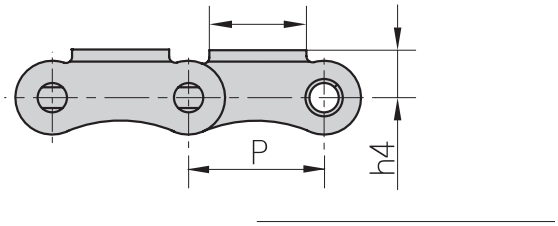



K1

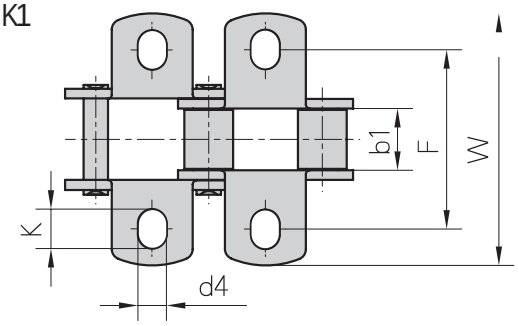



Chain ref.	P	d1	b1	d2	G	F	W	W1	h4	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
S55RH	41,40	17,78	22,23	8,90	25,0	63.6	90,4	67,4	15,5	8,6	12,0
S55RH 25	41,40	25,00	22,23	8,90	25,0	63.6	90,4	67,4	15,5	8,6	12,0

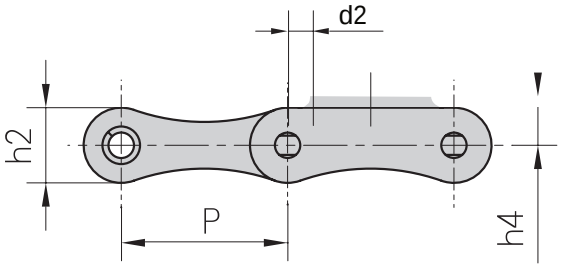


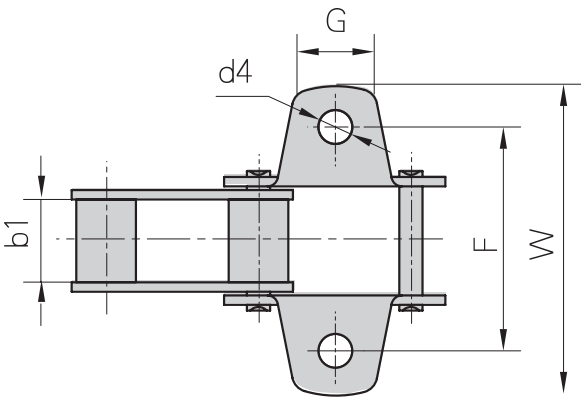


Chain ref.	P	d1	b1	d2	G	F	W	h4	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
S55F5	41,40	17,78	22,23	5,72	22,0	56,0	75,0	11,4	10,0	17,3
S77K1 F1	58,34	25,00	22,23	8,90	26,0	76,2	103,8	20,8	10,5	26,2

Chain with attachment for elevator, clean & return



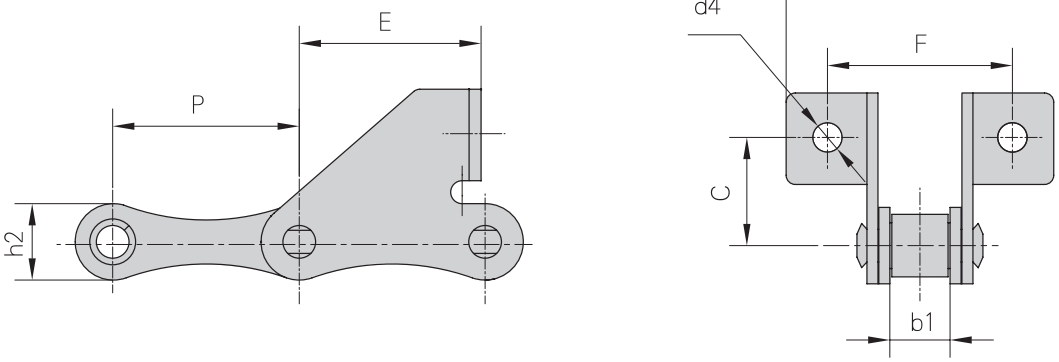

Chain no.	P	b1	C	E	F	W	d4	h2
	mm	mm	mm	mm	mm	mm	mm	mm
S32 SD	29,21	15,88	20,0	19,2	58,0	78,0	6,4	13,2
S45 SD	41,40	22,23	21,0	28.5	62,4	83,4	8,5	17,3
S51 SD	38,10	16,00	19,5	23,0	55,3	70,5	6,4	17,3
S52 SD	38,10	22,23	20,0	19,2	62,0	88,5	6,4	17,3
S52 LSD	38,10	16,40	20,0	17,5	54,5	71,0	6,5	16,5
S55 SD	41,40	22,23	20,0	37,0	58,0	87,0	6,8	17,3
S62 SD	41,91	26,20	20,0	32,6	61,4	92,0	6,4	17,3

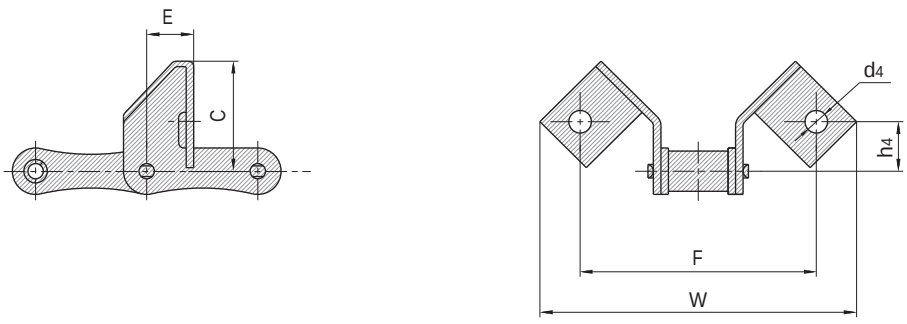


Att. No.	Chain No.	G	F	W	h4	d4	K
		mm	mm	mm	mm	mm	mm
F1	55V	40.0	25.0	88.0	118.0	18.0	8.4

Chain with attachment for corn head gathering




C6E

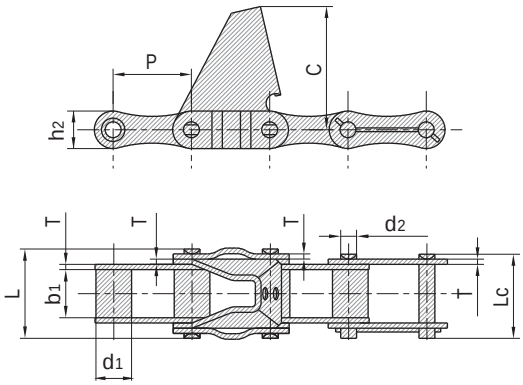

Att. No.	Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Plate dimension			Ultimate tensile strength	Average tensile strength
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	C	Q min	Q0
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
C6E	S62R	41.91	19.05	25.8	8.5	47.8	44.6	20.1	2.8/3.0	66.0	42.0/9448	43.7


TM77

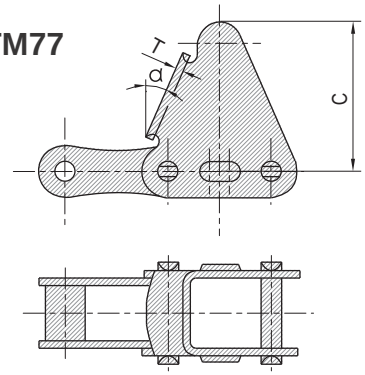


Att. No.	Chain No.	a	C	T
			mm	mm
TM77	CA643	28°	60.35	3.10



Chain with attachment for binding baler

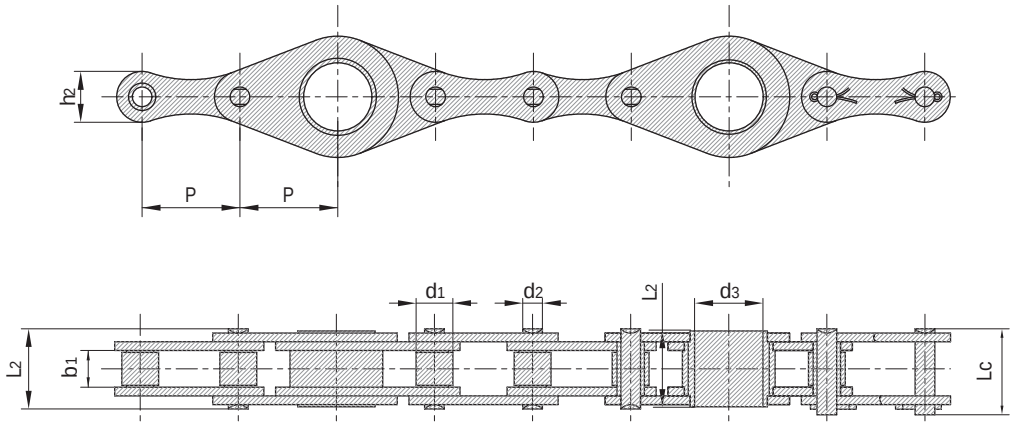

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Hollow pin inner diameter	Pin length			Inner plate depth	Ultimate tensile strength	Average tensile strength
	P	d1 max	b1 min	d2 max	d3 min	L max	L2 max	Lc max	T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
CA650	50.8	19.05	19.05	10.19	35.4	41.5	38.0	44.5	26.4	70.8	99.0
216 B	50.8	15.88	17.02	8.28	35.3	37.8	35.8	41.3	22.0	60.0	70.0

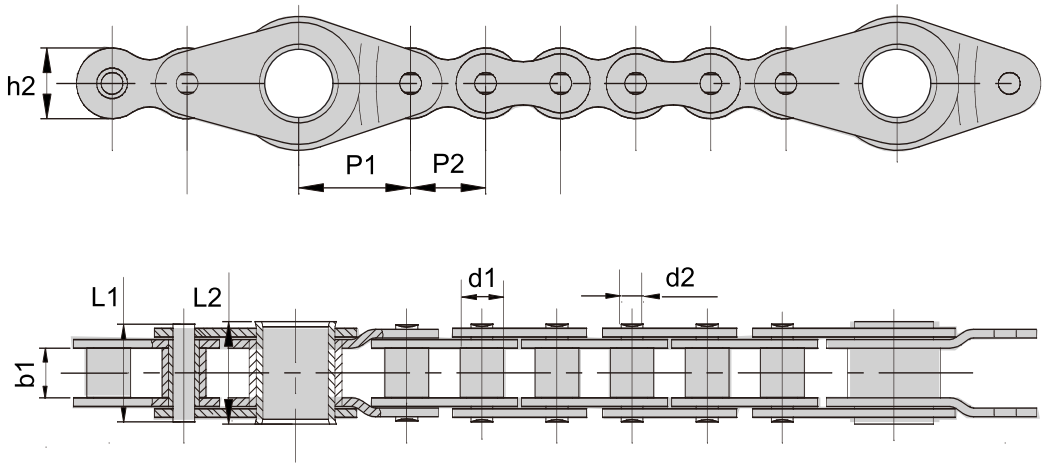

Chain No.	P1	P2	b1	d1	d2	L1	L2	h2	U.T. S. (KN)
24AF1	56.69	38.1	25.22	22.23	11.1	49.5	52	36	125