


Heavy duty offset sidebar roller chain

The cranked plate designed for high impact, heavy load transmission and frequent intermittent work application such as power drives, construction machinery, steel mill and conveyors; it operates under the most severe conditions at moderately high speeds.

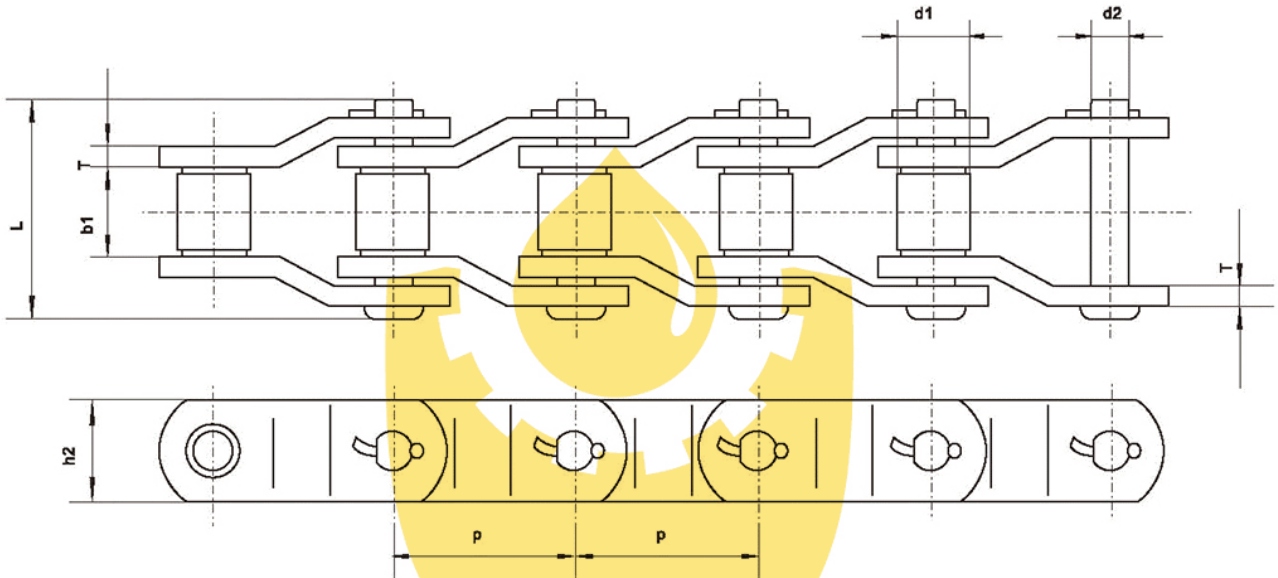

American Standard ISO 3512 / ANSI B29.10M

Chain No.	P	b1	d1	h2	T	L	d2	U.T. S. (KN)	Wt. (Kg/m)
2010	63.50	38.10	31.75	47.80	7.90	90.70	15.90	250	15
2512	77.90	39.60	41.28	60.50	9.70	103.40	19.08	340	18
2814	88.90	38.10	44.45	60.50	12.70	117.60	22.25	470	25
3315	103.45	49.30	45.24	63.50	14.20	134.90	23.85	550	27
3618	114.30	52.30	57.15	79.20	14.20	141.20	27.97	760	38
4020	127.00	69.90	63.50	91.90	15.70	168.10	31.78	990	52
4824	152.40	76.20	76.20	104.60	19.00	187.50	38.13	1400	73
5628	177.80	82.60	88.90	133.40	22.40	215.90	44.48	1890	108

Chinese Standard

WG781	78.18	38.10	33	45	10	97	17	250.00	16
WG103	103.20	49.20	46	60	13	125.50	23	450.00	26
WG103H	103.20	49.20	46	60	16	135	23	500.00	31
WG140	140.00	80.00	65	90	20	187	35	1100.00	59.20
WB10389	103.89	49.20	46	70	16	142	26.70	1000.00	32
WB9525	95.25	39.00	45	65	16	124	23	600.00	22.25
WB7900	79.00	39.00	31.50	54	9.50	93.50	18.50	350.00	12.28
WB7938	79.38	41.20	40	57.20	9.50	100	19.50	500.00	18.70
WB1198	119.89	44.00	36.8	45	10	103	21.00	280.00	23.00